

Lightsource Test Report

Product Information

Product Type: Ceiling light 24V Dual White D800 100W

Product Number: 2000K

CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.5208$ $y=0.4203$ $u(u')=0.2975$ $v=0.3602$ $v'=0.5402$

CCT: $T_c=2094K$ ($duv=0.00185$)

Color Ratio: $R=0.331$ $G=0.654$ $B=0.015$

Peak Wavelength: 631nm

Half Bandwidth: 115.8nm

Dominant Wavelength: 587.6nm

Color Purity: 0.825

Color Render Index: $R_a=92.2$, $CRI=90.3$

$R1=93$

$R2=97$

$R3=98$

$R4=93$

$R5=94$

$R6=98$

$R7=88$

$R8=77$

$R9=54$

$R10=94$


$R11=97$

$R12=93$

$R13=94$

$R14=99$

$R15=86$

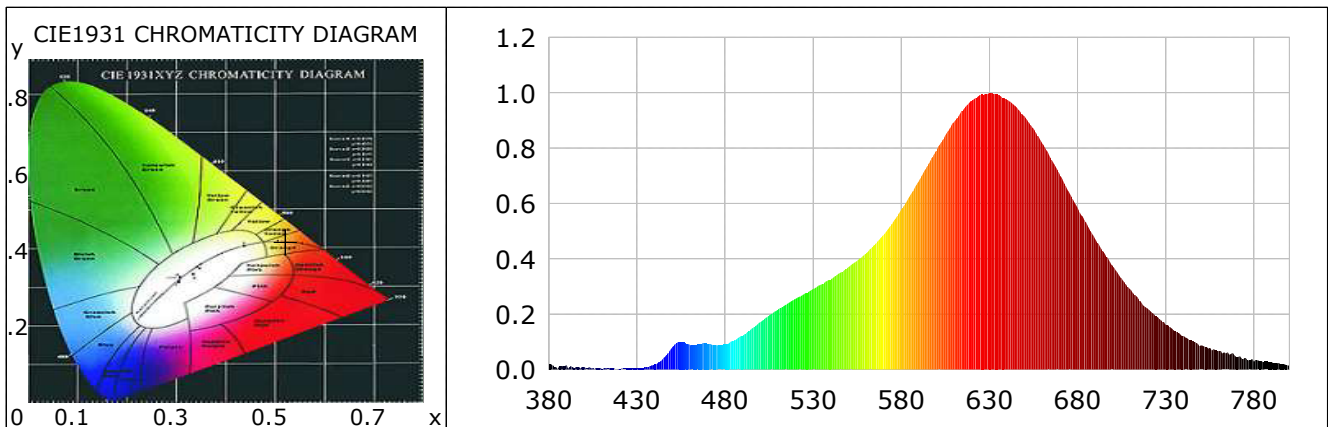

Photometric Parameters

Luminous Flux: 4462.23 lm

Efficiency: 88.96 lm/W

Radiant Power: 9.058 W

Electric Parameters

Voltage: 24.00V

Current: 2.0900A

Power: 50.16W

Power Factor: 0.0000

Frequency: 0.00Hz

Test Information

Scan Range: 380nm~800nm:1nm Photometric Method: sphere-spectroradiometer

Stabilization Time: 0 ms

Photometric Condition: Sphere diameter: 2.00m, 4 π

Max of Signal: 43069 (5427)

CCD Integration Time: 1340.17 ms

Condition: $T_x:0.0^\circ C$, $T_i:0.0^\circ C$, R.H.:60%

Test Lab:

Operator:

Test Device: Inventfine CMS-2

Test Time: 2024-09-27 11:11:54

Inspector:

Lightsource Test Report

Product Information

Product Type: Ceiling light 24V Dual White D800 100W

Product Number: 4000K

CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.3925$ $y=0.3687$ $u(u')=0.2365$ $v=0.3332$ $v'=0.4998$

CCT: $T_c=3813K$ ($duv=-0.00709$)

Color Ratio: R=0.226 G=0.730 B=0.044

Peak Wavelength: 453nm

Half Bandwidth: 25.6nm

Dominant Wavelength: 584.5nm

Color Purity: 0.284

Color Render Index: Ra= 96.2, CRI= 95.1

R1 =96

R2 =96

R3 =98

R4 =99

R5 =96

R6 =93

R7 =95

R8 =97

R9 =97

R10=94


R11=96

R12=79

R13=95

R14=99

R15=96

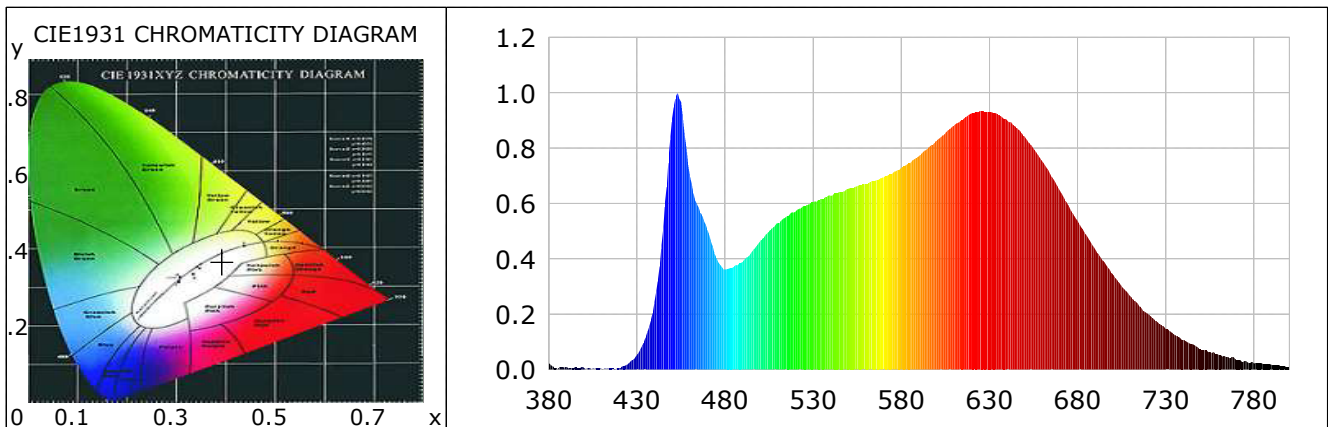

Photometric Parameters

Luminous Flux: 10301.08 lm

Efficiency: 101.88 lm/W

Radiant Power: 18.685 W

Electric Parameters

Voltage: 24.00V

Current: 4.2129A

Power: 101.11W

Power Factor: 0.0000

Frequency: 0.00Hz

Test Information

Scan Range: 380nm~800nm:1nm Photometric Method: sphere-spectroradiometer

Stabilization Time: 0 ms

Photometric Condition: Sphere diameter: 2.00m, 4 π

Max of Signal: 44735 (5167)

CCD Integration Time: 856.52 ms

Condition: Tx:0.0'C, Ti:0.0'C, R.H.:60%

Test Lab:

Operator:

Test Device: Inventfine CMS-2

Test Time: 2024-09-27 11:12:47

Inspector:

Lightsource Test Report

Product Information

Product Type: Ceiling light 24V Dual White D800 100W

Product Number: 6000K

CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.3151$ $y=0.3382$ $u(u')=0.1961$ $v=0.3157$ $v'=0.4735$

CCT: $T_c=6322K$ ($duv=0.00666$)

Color Ratio: $R=0.147$ $G=0.788$ $B=0.065$

Peak Wavelength: 453nm

Half Bandwidth: 23.9nm


Dominant Wavelength: 495.2nm

Color Purity: 0.059

Color Render Index: $R_a=92.5$, $CRI=89.3$

$R1=94$ $R2=94$ $R3=89$ $R4=93$ $R5=90$ $R6=87$ $R7=97$ $R8=95$

$R9=86$ $R10=82$ $R11=96$ $R12=55$ $R13=95$ $R14=94$ $R15=93$

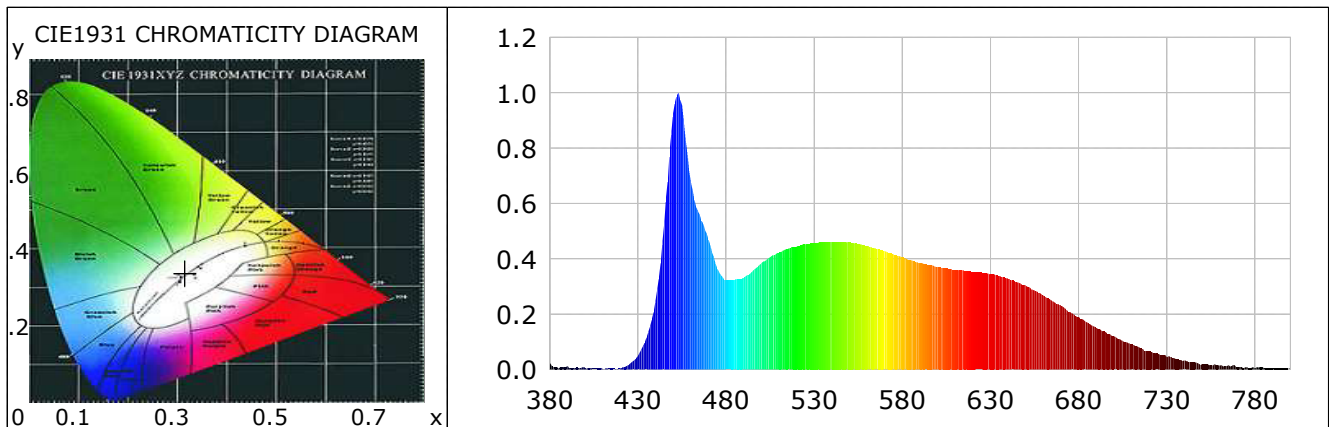

Photometric Parameters

Luminous Flux: 5713.12 lm

Efficiency: 114.08 lm/W

Radiant Power: 9.570 W

Electric Parameters

Voltage: 24.00V

Current: 2.0866A

Power: 50.08W Power

Factor: 0.0000

Frequency: 0.00Hz

Test Information

Scan Range: 380nm~800nm:1nm Photometric Method: sphere-spectroradiometer

Stabilization Time: 0 ms

Photometric Condition: Sphere diameter: 2.00m, 4 π

Max of Signal: 46342 (5182)

CCD Integration Time: 1043.87 ms

Condition: $T_x=0.0^\circ C$, $T_i=0.0^\circ C$, R.H.:60%

Test Lab:

Operator:

Test Device: Inventfine CMS-2

Test Time: 2024-09-27 11:13:50

Inspector: