

Lightsource Test Report

Product Information

Product Type: D200 Ceiling Light 18W

Product Number: 2000K

CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.5208$ $y=0.4203$ $u(u')=0.2975$ $v=0.3602$ $v'=0.5402$

CCT: $T_c=2094K$ ($duv=0.00185$)

Color Ratio: $R=0.331$ $G=0.654$ $B=0.015$

Peak Wavelength: 631nm

Half Bandwidth: 115.8nm

Dominant Wavelength: 587.6nm

Color Purity: 0.825

Color Render Index: $R_a=92.2$, $CRI=90.3$

$R1=93$

$R2=97$

$R3=98$

$R4=93$

$R5=94$

$R6=98$

$R7=88$

$R8=77$

$R9=54$

$R10=94$


$R11=97$

$R12=93$

$R13=94$

$R14=99$

$R15=86$

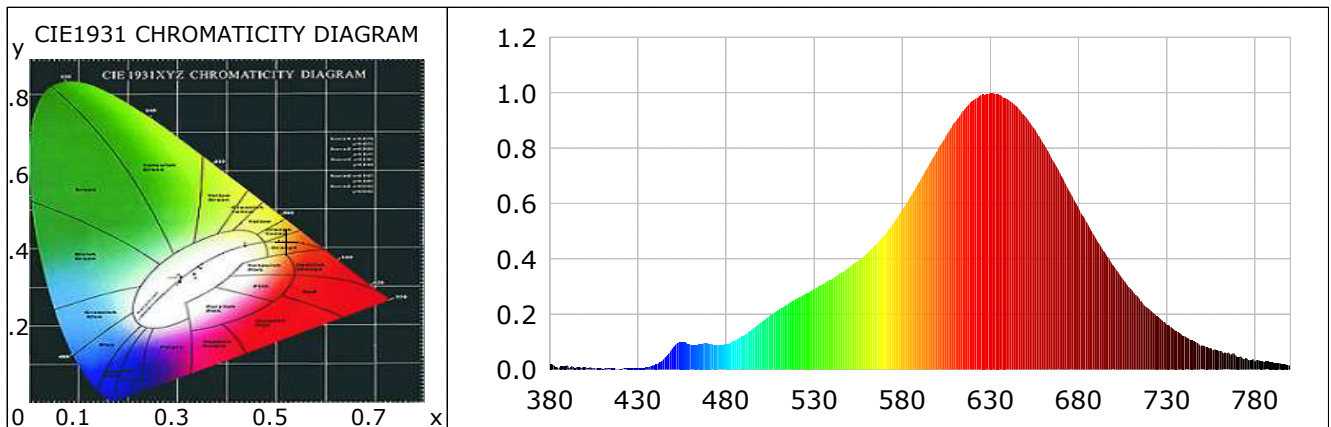

Photometric Parameters

Luminous Flux: 798.72 lm

Efficiency: 88.16 lm/W

Radiant Power: 3.058 W

Electric Parameters

Voltage: 24.00V

Current: 0.3775A

Power: 9.06W

Power Factor: 0.0000

Frequency: 0.00Hz

Test Information

Scan Range: 380nm~800nm:1nm Photometric Method: sphere-spectroradiometer

Stabilization Time: 0 ms

Photometric Condition: Sphere diameter: 2.00m, 4 π

Max of Signal: 43069 (5427)

CCD Integration Time: 1340.17 ms

Condition: $T_x=0.0^{\circ}C$, $T_i=0.0^{\circ}C$, R.H.:60%

Test Lab:

Operator:

Test Device: Inventfine CMS-2

Test Time: 2025-03-25 11:10:54

Inspector:

Lightsource Test Report

Product Information

Product Type: D200 Ceiling Light 18W

Product Number: 4000K

CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.3925$ $y=0.3687$ $u(u')=0.2365$ $v=0.3332$ $v'=0.4998$

CCT: $T_c=3913K$ ($duv=-0.00709$)

Color Ratio: $R=0.226$ $G=0.730$ $B=0.044$

Peak Wavelength: 453nm

Half Bandwidth: 25.6nm

Dominant Wavelength: 584.5nm

Color Purity: 0.284

Color Render Index: $R_a=96.2$, $CRI=95.1$

$R1=96$

$R2=96$

$R3=98$

$R4=99$

$R5=96$

$R6=93$

$R7=95$

$R8=97$

$R9=97$

$R10=94$


$R11=96$

$R12=79$

$R13=95$

$R14=99$

$R15=96$

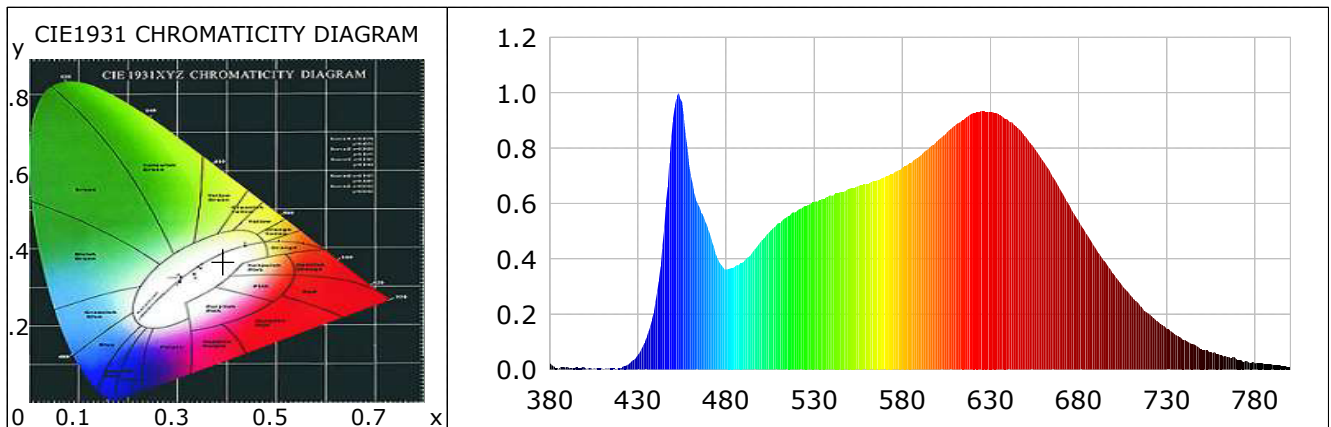

Photometric Parameters

Luminous Flux: 1807.42 lm

Efficiency: 101.48 lm/W

Radiant Power: 6.685 W

Electric Parameters

Voltage: 24.00V

Current: 0.7587A

Power: 18.21W

Power Factor: 0.0000

Frequency: 0.00Hz

Test Information

Scan Range: 380nm~800nm:1nm Photometric Method: sphere-spectroradiometer

Stabilization Time: 0 ms

Photometric Condition: Sphere diameter: 2.00m, 4 π

Max of Signal: 44735 (5167)

CCD Integration Time: 856.52 ms

Condition: $T_x=0.0^\circ C$, $T_i=0.0^\circ C$, R.H.:60%

Test Lab:

Operator:

Test Device: Inventfine CMS-2

Test Time: 2025-03-25 11:11:47

Inspector:

Lightsource Test Report

Product Information

Product Type: D200 Ceiling Light 18W

Product Number: 6000K

CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.3151$ $y=0.3382$ $u(u')=0.1961$ $v=0.3157$ $v'=0.4735$

CCT: $T_c=6122K$ ($duv=0.00666$)

Color Ratio: R=0.147 G=0.788 B=0.065

Peak Wavelength: 453nm

Half Bandwidth: 23.9nm


Dominant Wavelength: 495.2nm

Color Purity: 0.059

Color Render Index: Ra= 92.5, CRI= 89.3

R1 =94 R2 =94 R3 =89 R4 =93 R5 =90 R6 =87 R7 =97 R8 =95

R9 =86 R10=82 R11=96 R12=55 R13=95 R14=94 R15=93

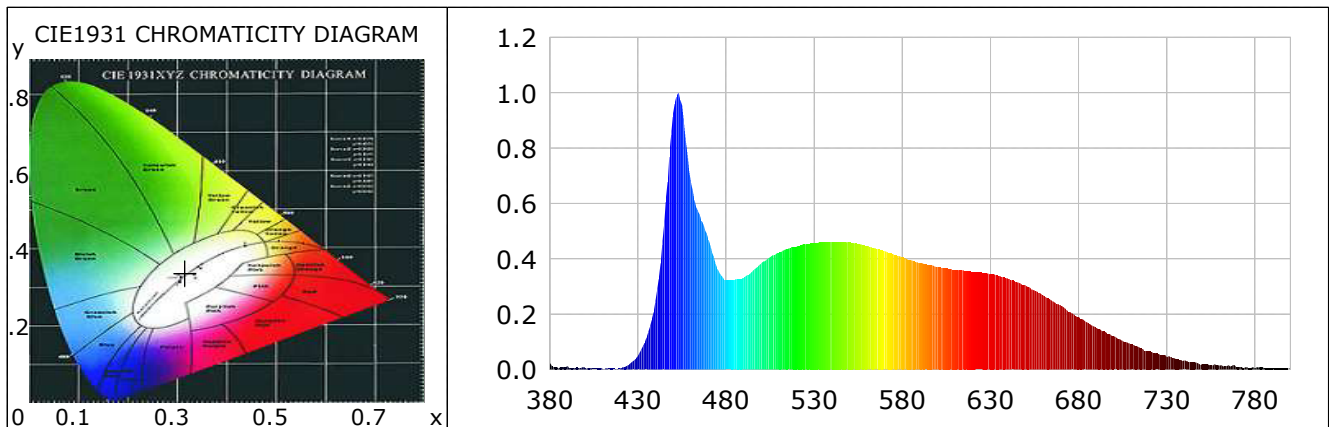

Photometric Parameters

Luminous Flux: 1026.49 lm

Efficiency: 113.05 lm/W

Radiant Power: 3.570 W

Electric Parameters

Voltage: 24.00V

Current: 0.3783A

Power: 9.08W

Power Factor: 0.0000

Frequency: 0.00Hz

Test Information

Scan Range: 380nm~800nm:1nm Photometric Method: sphere-spectroradiometer

Stabilization Time: 0 ms

Photometric Condition: Sphere diameter: 2.00m, 4π

Max of Signal: 46342 (5182)

CCD Integration Time: 1043.87 ms

Condition: Tx:0.0'C, Ti:0.0'C, R.H.:60%

Test Lab:

Operator:

Test Device: Inventfine CMS-2

Test Time: 2025-03-25 11:09:50

Inspector: